



*"WE CAN AGUASEAL THAT"*

**AGUASEAL WATERPROOFING SYSTEMS**

**AGUAGRIP**

# AGUAGRIP



## WHAT IS AGUAGRIP?

---

AguaGrip is a low viscosity primer adhesive that achieves excellent adhesion to virtually all roof substrates. It can be used to seal chalky residue substrates, to re-adhere loose granules on a cap sheet, and to encapsulate difficult to remove dust and dirt.


In addition, it makes for an excellent bleed-blocker and aid system for leveling surfaces, making them ready for application of any of the AguaSeal Roofing Systems, either pure acrylic (MonoBase) or cementitious (AguaBase).

AguaGrip can be used on virtually all substrates, including asphalt, concrete, granulated cap sheets, asbestos cement roofing, plastisol coated metal, and other pre-coated surfaces.

## WHAT ARE THE ADVANTAGES

---

- Insignificant VOC emissions
- No requirement to close buildings/factories during installation
- Non-toxic, zero hazmat - safe to apply
- Easy application & clean up
- No special equipment required to install product
- When used in conjunction with AguaPlus to level severely damaged roof substrates, AguaGrip can potentially eliminate the requirement for recovery board installation

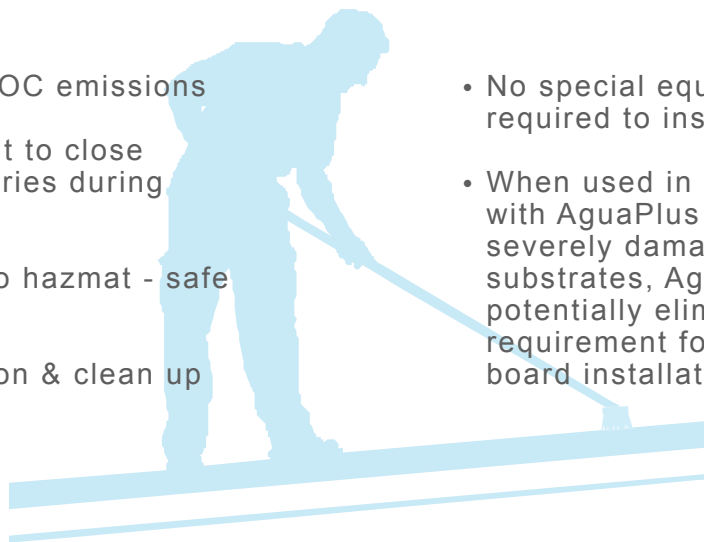

# AGUAGRIP



## APPLICATION INSTRUCTIONS

---

**1.** Hand stir the contents of the pail to ensure solid materials that may have settled are thoroughly mixed.

**2.** Apply AguaGrip with an approved brush, roller, or airless spray Graco Ultramax 595 or similar.

**3.** Do not use if temperatures are going to be below 32F / 0C.

**4.** Do not apply if the AguaGrip is likely to be affected by moisture or freezing temperatures before becoming thoroughly dried.

**5.** Protect the container from direct sunlight.

### COVERAGE:

(Dependent on surface and porosity of substrate)

Typically, to prime the substrate will require approximately 100 - 200 square feet per US gallon (2.4 sq. meters - 4.9 sq. meters per liter).

To adhere reinforcing fabric to the substrate, use at a rate of 2 - 3 US gallons per 100 square feet.

### CLEAN UP:

Thoroughly clean and rinse application equipment with fresh water.

## SAFETY & HANDLING

For specific information regarding the safe handling of AguaGrip please refer to the Safety Data Sheet.

# TECHNICAL DATA

---

## AGUAGRIP

Surface Characteristics	Slightly tacky with blue tint
Density	1.0 - 1.1
Viscosity	17 seconds ford cup 4, 25 centipoise
Shelf Life	18 months if containers are unopened and stored between 40F - 70F
Drying Time	1 - 2 hours at 70F, 55% Rh

---

**AGUASEAL WATERPROOFING SYSTEMS USA, LLC**

CHARLESTON, SC | [WWW.AGUASEAL.NET](http://WWW.AGUASEAL.NET)

[INFO@AGUASEAL.NET](mailto:INFO@AGUASEAL.NET) | 843 614 9663