



"WE CAN AGUASEAL THAT"

AGUASEAL WATERPROOFING SYSTEMS

A G U A P A T H

AGUAPATH

WHAT IS AGUAPATH?

AguaPath is a water-based, non-slip coating for application onto the AguaSeal range of roof coatings to provide walkways/pedestrian areas, etc.


AguaPath has a fine aggregate incorporated to give a non-slip surface.

AguaPath is hard wearing and formulated to give protection to the AguaSeal topcoats from foot traffic.



APPLICATION INSTRUCTIONS

- Tape off the areas necessary to create walkways.
- Thoroughly hand stir the pail of AguaPath to ensure all solids are re-distributed.
- Brush or roller AguaPath onto the substrate at a coverage rate of 200 sq ft per gallon.
- Allow to dry.
- Brush or roller a second coat at a coverage rate of 200 sq ft per gallon.

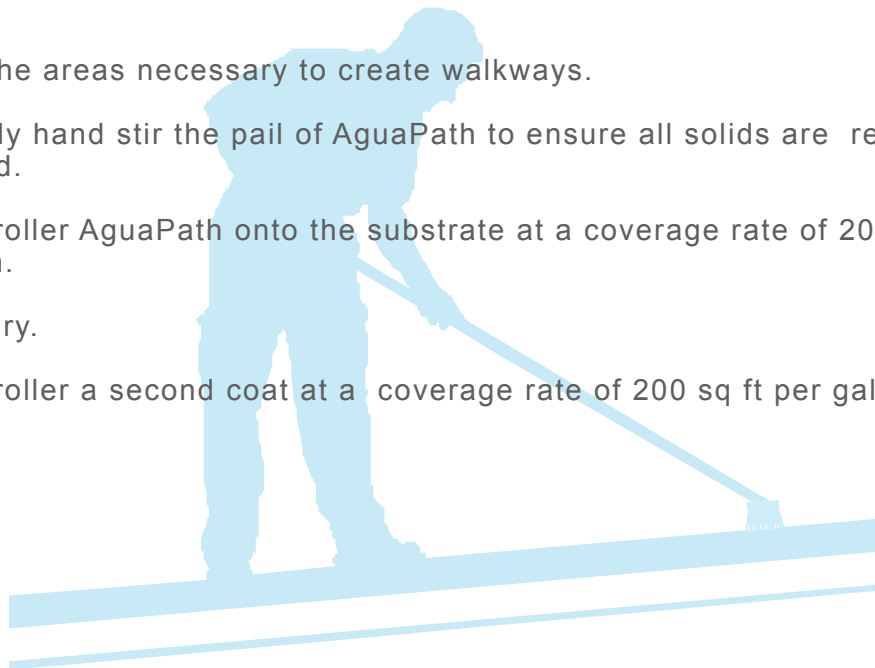

TECHNICAL DATA

AGUAPATH

Substrate	For use on AguaSeal Waterproofing Systems Topcoats (AguaBase when used as a finish coat, MonoTop or MonoTop Gloss).
Solids by weight	56%
Density	1.32 kg per liter
Shelf Life	18 months if unopened and stored out of direct sunlight between 40F to 70F
Surface Finish	Fine granular, non-slip
Clean Up	Clean up with water
Precautions	Do not use if temperatures are below 50F. Do not subject AguaPath to moisture or freezing conditions until thoroughly dried. Protect the container from direct sunlight and frost.
Drying Time	3-4 hours between coats at 70F and 55% relative humidity; Allow to dry thoroughly before allowing foot traffic (7-8 hours)

AGUASEAL WATERPROOFING SYSTEMS USA, LLC

CHARLESTON, SC | WWW.AGUASEAL.COM

INFO@AGUASEAL.NET | 843 614 9663